



Bound Wireless In-ear Headphones

TLL511261- User manual



INTO YOUR FUTURE

ENJOY MUSIC

1. It is recommended to listen at medium volume, don't turn the volume too high, because can damage to your ears.
2. Please avoid wearing it for a long time.


Charging

1. Connect the charging port with any USB charging adapter or active computer USB port.
2. Charging will start automatically with LCD indicator turning red.
3. The headphone is fully charged when LED indicator off.

Pairing

1. Make sure the headphone and your wireless device are next to each other (within 1m)
2. Press and hold the multifunction button for 3S to bring the headphone into pairing mode with LED indicator flashing blue and red alternately.
3. Activate Bluetooth function on your phone and search for the Bluetooth headset's name: Tellur Bound
4. Once connected, only the blue LED will flash once every 5s.

FEATURES

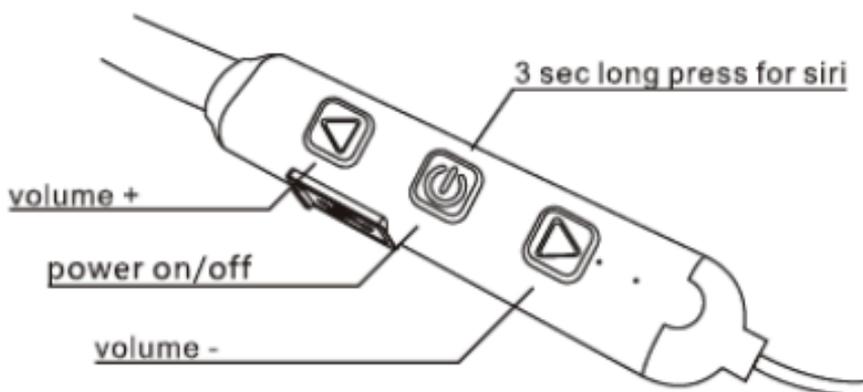

Bluetooth version: v5.0

Wireless range: 10 m

Frequency: 2.4GHz, Class 2

Supported profiles: HFP, HSP, A2DP, AVRCP

Multipoint technology: Yes

Driver unit: 10mm

Frequency response: 20-20kHz

Sensitivities: 105±3dB

Impedance: 16Ω±15%

Music play time: up to 6 hours

Talk time: up to 6 hours

Standby time: up to 20 hours

Charge time: up to 1.5 hour

Volume control: Yes

Cord length: 26 cm x 2

Input: Micro-USB

Bluetooth pairing name: Tellur Bound

Product dimensions: 50 x 12 x 2.4 cm

Product weight: 25g

BUTTON CONTROL

Function/Operation

Power ON/Off: Press and hold the multifunction button for 5s

Play/Pause: Press the multifunction button

Volume +/- : Press the volume +/-

Play Next/Previous: Press and hold the volume +/- button for 2s

Answer Phone Call: Press the multifunction button

Hang Up: Press the multifunction button for 2s

Reject Phone Call: Press the multifunction button for 2s

Redial: Press the multifunction button twice to redial the latest phone number

Pairing Mode: When headphone is Off, press the multifunction button for 3s

Siri: Press and hold the multifunction button for 3s

LED Indicator/Status

Solid red Charging

Flashes blue and red alternately In pairing Mode

Flashes blue and red alternately Disconnected from wireless device

Flashes blue once every 5s Paired with a wireless device

Disposal and recycling information



The crossed-out wheeled-bin symbol on your product, battery, literature or packaging reminds you that all electronic products and batteries must be taken to separate waste collection points at the end of their working lives; they must not be disposed of in the normal waste stream with household garbage.

It is the responsibility of the user to dispose of the equipment using a designated collection point or service for separate recycling of waste electrical and electronic equipment (WEEE) and batteries according to local laws.

Proper collection and recycling of your equipment helps ensure EEE waste is recycled in a manner that conserves valuable materials and protects human health and the environment, improper handling, accidental breakage, damage, and/or improper recycling at the end of its life may be harmful for health and environment.



ABN Systems International

📍 Str. Marinariilor, nr.29
Sector 1, Bucuresti, Romania

☎ 004,021,233,09,95

✉ office@tellur.com
office@abnsystems.ro

🌐 www.tellur.com